



Comoda e vivace, questa sedia in polipropilene viene proposta in un restyling che valorizza il comfort e la praticità. È disponibile la versione con bracciolo a sbalzo, oltre alla versione con agganci e tavoletta scrittoio. La serie prevede base 4 gambe, slitta, cantilever, girevole, sgabello e panca.

Comfortable and lively, this polypropylene chair comes in a restyling which enhances its comfort and practicality. It is available in version with cantilever armrest, in addition to the version with hooks and tablet arm. The series features base with 4 legs, sled, cantilever and swivel base, stool and bench versions.

REPLAY 560

Design: Giancarlo Bisaglia



REPLAY HAS A PERFORATED
BACKREST WHICH IS ELEGANT
AND STURDY



REPLAY 560 4 LEGS



REPLAY 560 4 LEGS WITH ARMS



REPLAY 560 4 LEGS WITH CASTORS



REPLAY 560 CANTILEVER



REPLAY 560 CANTILEVER WITH ARMS



REPLAY 560 SWIVEL



REPLAY 560 4 LEGS FOR UPHOLSTERY



REPLAY 560 4 LEGS WITH ARMS FOR UPHOLSTERY



REPLAY 560 SLED



REPLAY 560 STOOL



REPLAY 560 ON CORE BENCH



REPLAY 560 ON LINEAR BENCH



REPLAY 560 ON 500 BENCH

01.
 Sedile e schienale in polipropilene
 Telaio in acciaio cromato, verniciato grigio
 o nero
*Polypropylene seat and backrest
 Chromium-plated and grey or black
 painted steel frame*



02.
 Tavoleta scrittoio
Writing tablet

03.
 Versione tappezzabile
Version for upholstery



04.
 Carrello
Trolley

REPLAY

Design: Giancarlo Bisaglia

Sedile e schienale in polipropilene. Carter sottosedile in polipropilene caricato fibra di vetro. A richiesta e per lotti d'acquisto da definire con l'ufficio commerciale, è possibile avere sedile e schienale ignifugo. Nella versione 4 gambe possibilità di avere agganci tra sedia e sedia in tondino Ø 5 mm cromato da fissare al sottosedile. I puntali sono in polipropilene colore nero. Gambe anteriori, posteriori, struttura sottosedile e telaio slitta in tubo tondo Ø 22 mm, spessore 1,5 mm, secondo norma UNI 10305-3. Impilabilità massima: 6 sedie al suolo. Carrello verniciato in epossipoliesteri nero per trasporto massimo 10 sedie disponibile a catalogo. Struttura sedile e supporto schienale del telaio cantilever in tubo tondo Ø 22 mm, spessore 2,5 mm in ASF420 secondo norma UNI 10305-3. Piedini polipropilene colore nero nella versione cantilever. Versione sgabello: gambe anteriori, posteriori e struttura sottosedile in tubo tondo Ø 22 mm, spessore 1,5 mm, secondo norma UNI 10305-3. Poggiapiedi in tondino Ø 11 mm. Finitura telaio: cromato con spessore medio di 5 micron, verniciato con polveri epossipoliesteri di colore nero o grigio gofrato con spessore medio di 50 micron. Versione girevole: scocca in tubo tondo Ø 22 mm, spessore 1,5 mm, secondo norma UNI 10305-3. Piastra con leva a gas per la regolazione dell'altezza del sedile. Colonna a gas Ø 50 cromata. Base 5 razze in alluminio pulito Ø 660 mm. Ruote in polipropilene Ø 50 mm perno Ø 11 mm.

Per le specifiche relative alla versione panca vedi da pag. 219 in poi.

Polypropylene seat and backrest. Fiberglass-filled polypropylene seat outer cover. On request and for purchase quantities to be agreed with the sales department, seat and backrest can be supplied in fireproof version. In the 4-leg version, possibility of chromium-plated Ø 5 mm steel rod seat connection hooks for fixing to seat outer. Black polypropylene end-pieces. Front and rear legs, seat outer structure and sled frame in round tube Ø 22 mm, thickness 1.5 mm, in compliance with UNI 10305-3 standard. Maximum stackability: 6 chairs on floor. Black epoxy-polyester powder coated trolley for transporting maximum 10 chairs, available from catalogue. Seat structure and backrest support of cantilever frame in round tube Ø 22 mm, thickness 2.5 mm, in ASF420 in compliance with UNI 10305-3 standard. Black polypropylene feet in cantilever version. Stool version: front and rear legs and seat outer structure made of round steel tube Ø 22 mm, thickness 1.5 mm, in compliance with UNI 10305-3 standard. Footrest made of steel rod Ø 11 mm. Frame finish: chromium plating, average thickness 5 microns, or black or embossed grey epoxy-polyester powder coating, average thickness 50 microns. Swivel version: shell in round tube Ø 22 mm, thickness 1.5 mm, in compliance with UNI 10305-3 standard. Plate with gas lever for seat height adjustment. Chromium-plated Ø 50 gas column. 5-star base in Ø 660 mm polished aluminium. Polypropylene castors Ø 50 mm pin Ø 11 mm.

For the specifications of the bench version see from page 219 onwards.

Colori plastiche Plastic colours



S001
Nero
Black



S020
Bianco
White



S007
Grigio cemento
Cement grey



S011
Antracite
Anthracite


Parti in metallo Metal parts



O3
Verniciato nero gofrato
Embossed black painted



37
Verniciato alluminio gofrato
Embossed painted aluminium



O1
Cromato
Chromium plated



OOL
Alluminio pulito
Polished aluminium

Parti in alluminio Aluminium parts

Parti in plastica per basi girevoli Plastic parts for swivel bases




S001
Nero
Black




7035G
Grigio luce
Light grey



REPLAY 4 LEGS





REPLAY 4 LEGS WITH ARMS




REPLAY 560 4 LEGS WITH CASTORS




REPLAY 560 CANTILEVER




REPLAY 560 STOOL




REPLAY 560 ON CORE BENCH

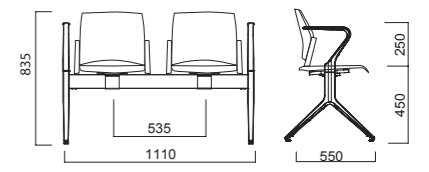



REPLAY 560 4 LEGS FOR UPHOLSTERY





REPLAY 560 4 LEGS WITH ARMS FOR UPHOLSTERY




REPLAY 560 SWIVEL



REPLAY 560 SLED



REPLAY 560 STOOL WITH ARMS



REPLAY 560 ON 500 BENCH

