



Su richiesta, sedili e schienali realizzati con plastica riciclata Post Consumo Urbano (PCR) proveniente dalla raccolta differenziata dei rifiuti urbani, disponibili nel colore grigio medio, con certificazione ambientale "Plastica Seconda Vita".

On request, seats and backrests made of post-consumer recycled plastic (PCR) from the separate collection of urban waste, available in medium grey colour, with 'Plastic Second Life' environmental certification.



RESTART 580

Design: Giancarlo Bisaglia



COMFORTABLE AND
LIVELY, THIS CHAIR COMES
IN A RESTYLING WHICH
ENHANCES ITS COMFORT



RESTART 580 4 LEGS



RESTART 580 4 LEGS WITH ARMS



RESTART 580 4 LEGS WITH WRITING
TABLET



RESTART 580 4 LEGS WITH CASTORS



RESTART 580 4 LEGS WITH ARMS AND CASTORS



RESTART 580 CANTILEVER



RESTART 580 CANTILEVER WITH ARMS



RESTART 580 SLED



RESTART 580 SWIVEL



RESTART 580 SWIVEL WITH ARMS



RESTART 580 STOOL



RESTART 580 ON CORE BENCH



RESTART 580 ON LINEAR BENCH



RESTART 580 ON 500 BENCH

01.
Versione rete
Mesh version



02.
Disponibile con e senza braccioli e con
tavoletta scrittoio sia destra che sinistra
*Available with and without armrests and
with RH and LH tablet arm*

03.
Agganci
Linking device



04.
Impilabilità massima: 10 sedie su carrello
Maximum stackability: 10 chairs on trolley

RESTART 580

Design: Giancarlo Bisaglia

Sedile e schienale in polipropilene. Carter sottosedile in polipropilene caricato fibra di vetro. A richiesta e per lotti d'acquisto da definire con l'ufficio commerciale, è possibile avere sedile e schienale ignifugo. Nella versione 4 gambe possibilità di avere agganci tra sedia e sedia in tondino Ø 5 mm cromato da fissare al sottosedile. I puntali sono in polipropilene colore nero. Gambe anteriori, posteriori, struttura sottosedile e telaio a slitta in tubo tondo Ø 22 mm, spessore 1,5 mm, secondo norma UNI 10305-3. Impilabilità massima: 6 sedie. Carrello verniciato in epossipoliestere nero per trasporto massimo 10 sedie disponibile a catalogo. Struttura sedile e supporto schienale del telaio cantilever in tubo tondo Ø 22 mm, spessore 2,5 mm in ASF420 secondo norma UNI 10305-3. Piedini polipropilene colore nero nella versione cantilever. Versione sgabello: gambe anteriori, posteriori e struttura sottosedile in tubo tondo Ø 22 mm, spessore 1,5 mm, secondo norma UNI 10305-3. Poggiapiedi in tondino Ø 11 mm. Finitura telaio: cromato con spessore medio di 5 micron, verniciato con polveri epossipoliestere di colore nero o grigio gofrato con spessore medio di 50 micron. Versione girevole: scocca in tubo tondo Ø 22 mm, spessore 1,5 mm, secondo norma UNI 10305-3. Piastra con leva a gas per la regolazione dell'altezza del sedile. Colonna a gas Ø 50 cromata. Base 5 razze in alluminio pulito Ø 660 mm. Ruote in polipropilene Ø 50 mm perno Ø 11 mm.

Per le specifiche relative alla versione panca vedi da pag. 219 in poi.

Polypropylene seat and backrest. Fiberglass-filled polypropylene seat outer cover. On request and for purchase quantities to be agreed with the sales department, seat and backrest can be supplied in fireproof version. In the 4-leg version, possibility of chromium-plated Ø 5 mm steel rod seat connection hooks for fixing to seat outer. Black polypropylene end-pieces. Front and rear legs, seat outer structure and sled frame in round tube Ø 22 mm, thickness 1.5 mm, in compliance with UNI 10305-3 standard. Maximum stackability: 6 chairs. Black epoxy-polyester powder coated trolley for transporting maximum 10 chairs, available from catalogue. Seat structure and backrest support of cantilever frame in round tube Ø 22 mm, thickness 2.5 mm, in ASF420 in compliance with UNI 10305-3 standard. Black polypropylene feet in cantilever version. Stool version: front and rear legs and seat outer structure made of round steel tube Ø 22 mm, thickness 1.5 mm, in compliance with UNI 10305-3 standard. Footrest made of steel rod Ø 11 mm. Frame finish: chromium plating, average thickness 5 microns, or black or embossed grey epoxy-polyester powder coating, average thickness 50 microns. Swivel version: shell in round tube Ø 22 mm, thickness 1.5 mm, in compliance with UNI 10305-3 standard. Plate with gas lever for seat height adjustment. Chromium-plated Ø 50 gas column. 5-star base in Ø 660 mm polished aluminium. Polypropylene castors Ø 50 mm pin Ø 11 mm. For the specifications of the bench version see from page 219 onwards.

Colori plastiche Plastic colours



S001
Nero
Black



S020
Bianco
White



S007
Grigio cemento
Cement grey



S011
Antracite
Anthracite



S076
Grigio medio
Medium grey




Parti in metallo Metal parts



O3
Verniciato nero gofrato
Embossed black painted



37
Verniciato alluminio gofrato
Embossed painted aluminium



O1
Cromato
Chromium plated



OOL
Alluminio pulito
Polished aluminium

Parti in alluminio Aluminium parts

Parti in plastica per basi girevoli Plastic for swivel bases



S001
Nero
Black




7035G
Grigio luce
Light grey

Certificazioni Certifications




EN 16139



RESTART 580 4 LEGS





RESTART 580 4 LEGS WITH ARMS




RESTART 580 4 LEGS WITH CASTORS




RESTART 580 CANTILEVER




RESTART 580 STOOL




RESTART 580 ON CORE BENCH

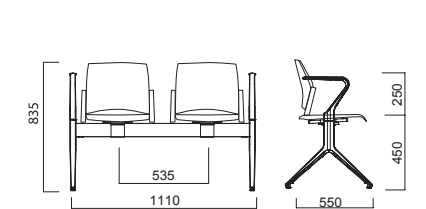



RESTART 580 4 LEGS FOR UPHOLSTERY





RESTART 580 4 LEGS WITH ARMS FOR UPHOLSTERY




RESTART 580 SWIVEL



RESTART 580 SLED



RESTART 580STOOL WITH ARMS



RESTART 580 ON 500 BENCH

